

SILICON MOS N-CHANNEL RF POWER TRANSISTOR 30 W, up to 150 MHz, Enhancement Mode


The silicon MOS transistor is designed for professional transmitter applications in the HF/VHF frequency range.

Features:

- Power Gain: 16 dB typ
- Output Power: 30 W
- Efficiency: 60 % typ

Absolute Maximum Ratings

Parameters	Sym	Value	Unit
Drain-Source Voltage	V_{DSS}	65	V_{DC}
Drain Current-Continuous	I_D	5	A_{DC}
Gate-Source Voltage	V_{GS}	± 40	V_{DC}
Storage Temperature Range	T_{STG}	-65 tu +150	$^{\circ}C$
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.75	$^{\circ}C/W$
Total Power Dissipation @ $T_C=25^{\circ}C$	P_D	100	W

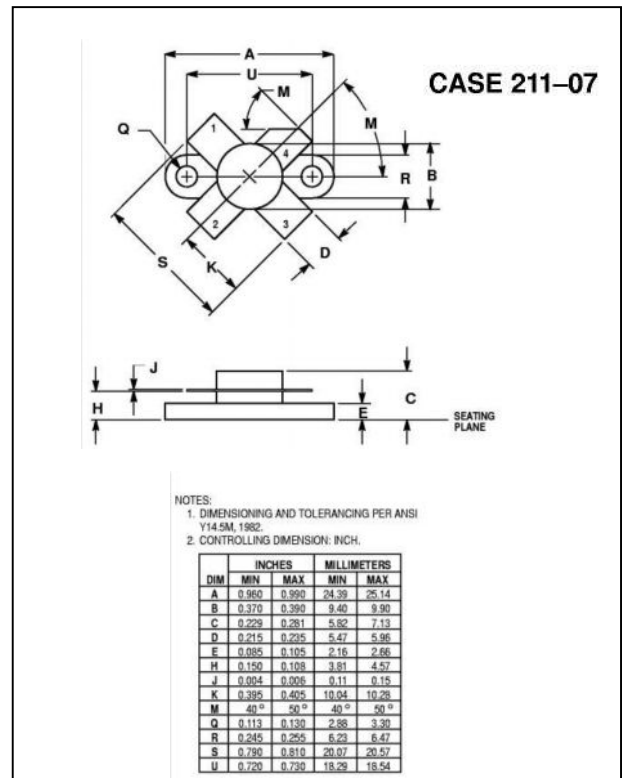

Parameters

Parameter	Symbol	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage ($I_D=10.0$ mA, $V_{GS}=0$ V)	$V_{(BR)DSS}$	65	—	—	V_{DC}
Gate-Source Leakage Current ($V_{GS}=20$ V, $V_{DS}=0$ V)	I_{GSS}	—	—	1.0	μA_{DC}
Zero Gate Voltage Drain Leakage Current ($V_{DS} = 28$ V, $V_{GS}=0$ V)	I_{DSS}	—	—	4.0	mA_{DC}
Gate Threshold Voltage ($V_{DS} = 10$ V, $I_D = 25$ mA)	$V_{GS(TH)}$	1	—	6	V_{DC}
Forward Transconductance ($V_{DS} = 10$ V, $I_D = 0.5$ A)	G_{FS}	0.5	0.75	—	mhos
Input Capacitance ($V_{DS} = 28$ V, $V_{GS}=0$ V, $f = 1$ MHz)	C_{ISS}	—	48	—	pF
Output Capacitance ($V_{DS} = 28$ V, $V_{GS}=0$ V, $f = 1$ MHz)	C_{OSS}	—	54	—	pF
Reverse Transfer Capacitance ($V_{DS} = 28$ V, $V_{GS}=0$ V, $f = 1$ MHz)	C_{RSS}	—	11	—	pF
Power Gain ($V_{DS} = 28$ V, $P_{OUT} = 5$ W, $I_{DQ} = 25$ mA, $f = 150$ MHz)	G_p	13	16	—	dB
Drain Efficiency ($V_{DS} = 28$ V, $P_{OUT} = 5$ W, $I_{DQ} = 25$ mA, $f = 150$ MHz)	η_D	50	60	—	%

ZAO 'Syntez Microelectronics'

119V Leninsky Prospekt, Voronezh 394007, Russia • Tel +7-4732-379-101 Fax +7-4732-266-057

exim@syntezmicro.ru

www.syntezmicro.ru

Specification is subject to change without notice