


## Power RF Amplifier

Power = 16 Watts  
 Bandwidth = 2.0 to 2.5 MHz  
 Gain = 32dB Vdd=12.5 Volts  
 50 Ohms Input/Output Impedance  
 Copper Flange

### Description

The UM126-1 is 16 Watt FM amplifier module covering a bandwidth of 2.0-2.5 MHz. This dual stage amplifier is specifically designed for Land Mobile HF band portable radio applications.

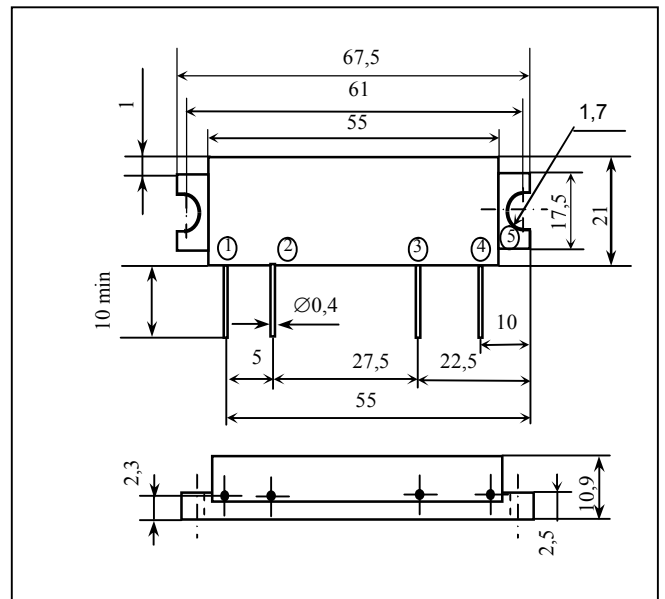


### Absolute Maximum Ratings (T=25°C)

Parameter	Symbol	Value	Unit
DC supply Voltage	VDD	16.5	V
DC gate Voltage, Power control	VGG	5.0	V
Input Power	Pin	30	mW
Output Power	Pout	25	W
Operating Case Temp.	Tc	-40 to +85	°C
Storage Temperature	Tstg	-60 to +100	°C

Electrical Characteristics: (Tc = 25°C, Zs = Zl = 50 Ohms. Vdd = 12.5 Volts. Vgg = 5 Volts.)


Parameter	Symbol	Min	Typical	Max	Unit	Test Conditions
Frequency Range	BW	300		308	MHz	50 Ohm load
Output Power	Pout	16	20		Watts	
Power Gain	PG	32	34		dB	
Total Efficiency	$\eta$	40	50		%	Po=16W, CW
2 <sup>nd</sup> Harmonic	F <sub>2</sub>			-55	dBc	
3 <sup>rd</sup> Harmonic	F <sub>3</sub>			-60	dBc	
Load Mismatch	$\Psi$	No degradation or destroy				Pin=10mW, Po=16W, VSWR =20

## Block diagram

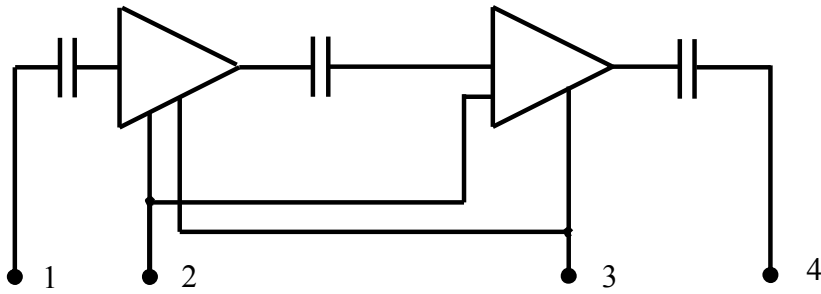

- 1- RF input
- 2- Gate Voltage (V<sub>gg</sub>), Power Control
- 3- Drain Voltage (V<sub>dd</sub>)
- 4- RF Output (P<sub>out</sub>)
- 5- RF Ground (Case)

## Test block diagram

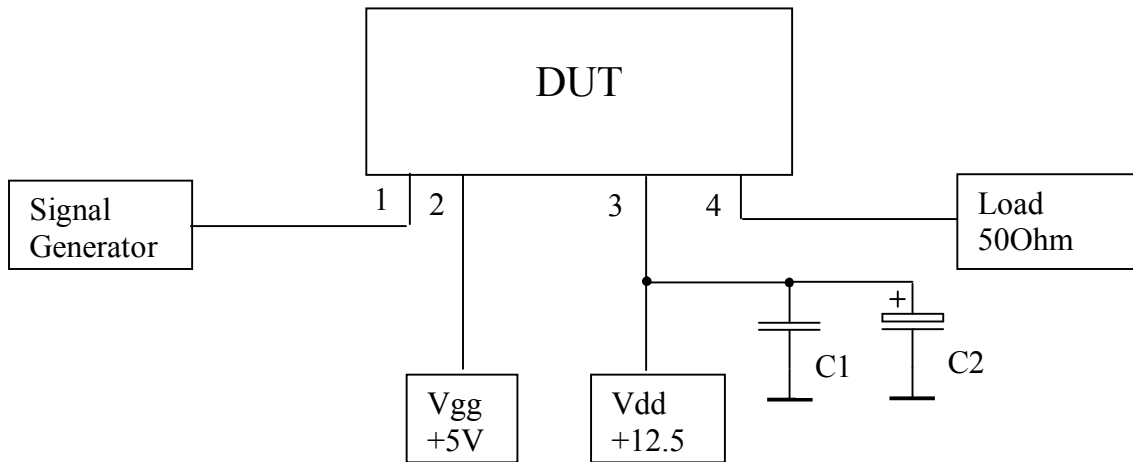

- C1- 0.1uF
- C2- 100uF

## ZAO 'Syntez Microelectronics'

119V Leninsky Prospekt, Voronezh 394007, Russia • Tel +7-4732-379-101 Fax +7-4732-266-057

[exim@syntezmicro.ru](mailto:exim@syntezmicro.ru)

[www.syntezmicro.ru](http://www.syntezmicro.ru)

*Specification is subject to change without notice*