

NPN SILICON RF POWER TRANSISTOR


KT9155B

Designed for operation in Class AB linear push-pull power amplifiers of TV and radio transmitters

- Output power = 50 W, $f = 860$ MHz, $V_{CC} = 28$ V
- Power gain = 6 dB (min)
- Efficiency = 40% (min)

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CER}	50	V
Emitter-Base Voltage	V_{EBO}	3	V
Collector Current	I_C	15	A
Operating Junction Temperature	T_j	+200	°C
Storage Temperature Range	T_{stg}	-65 to +150	°C
Thermal Resistance (junction to case)	$R_{\theta JC}$	1.4	°C/W
Total Power Dissipation, $T_C=25$ °C	P_D	125	W

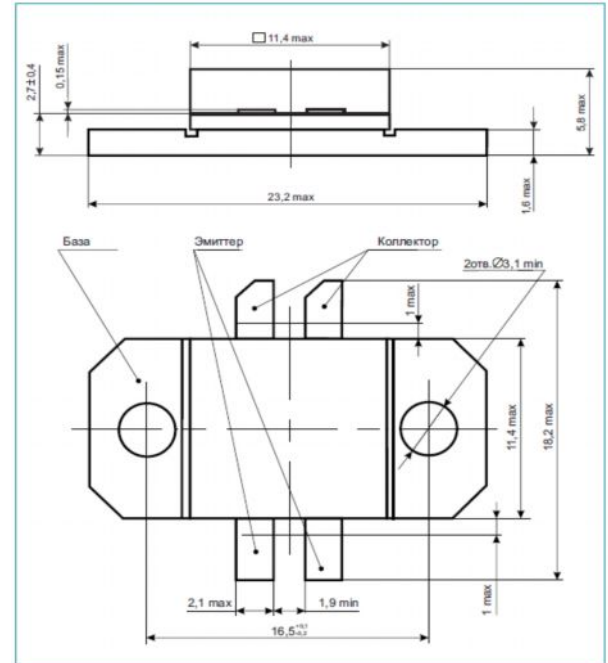

Case KT-44

FUNCTIONAL TESTS

Characteristics	Symbol	Value			Unit
		min	typ	max	
Common-Emitter Amplifier Power Gain ($V_{CC} = 28$ V, $P_{out} = 50$ W @ 1 dB Comp., $f = 860$ MHz)	G_P	6			dB
Collector Efficiency ($V_{CC} = 28$ V, $P_{out} = 50$ W, $f = 860$ MHz)	η_C	45			%

ZAO 'SynteZ Microelectronics'

119V Leninsky Prospekt, Voronezh 394007, Russia • Tel +7-4732-379-101 Fax +7-4732-266-057

exim@syntezmicro.ru

www.syntezmicro.ru

Specification is subject to change without notice